



PLAN VIEW WITH TOP COVERS REMOVED

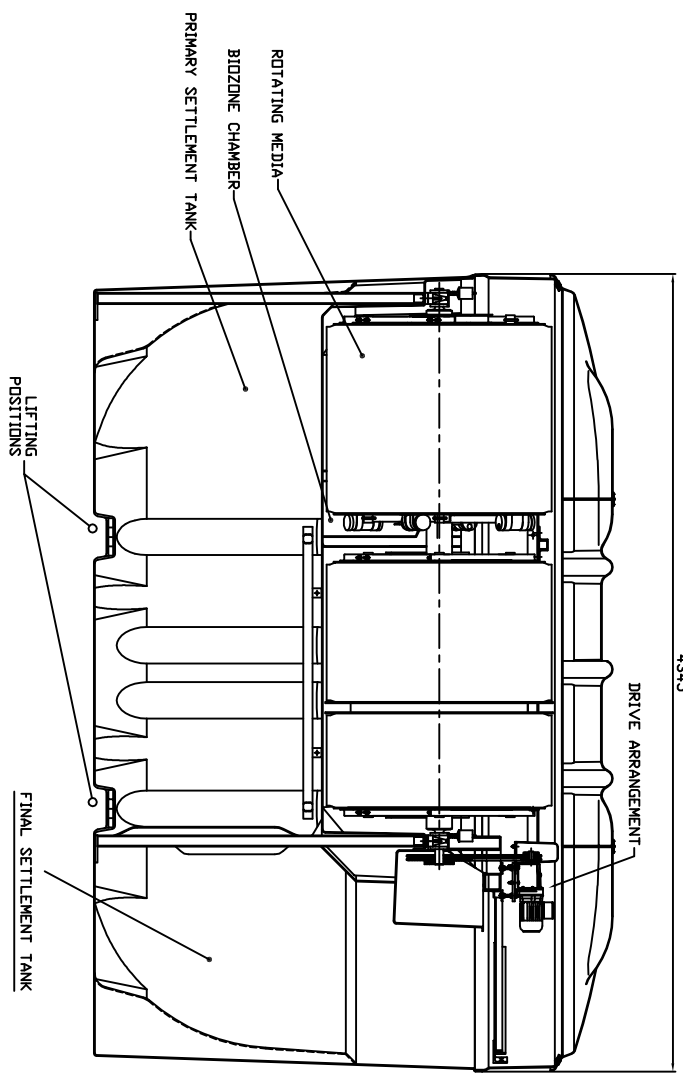

APPROX. DRY WEIGHT 1315 KG

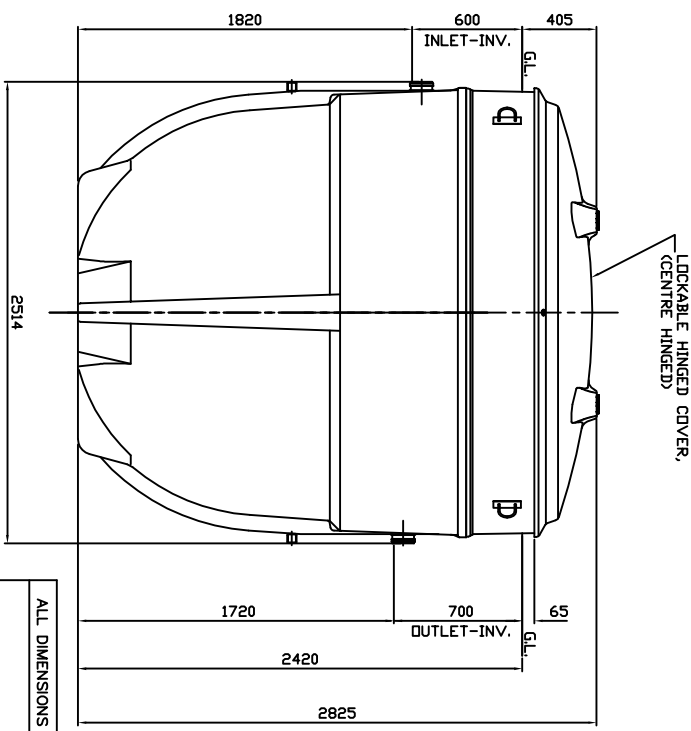

END ELEVATION

- NOTES**
1. BIDDISC TANK AND COVER ARE MANUFACTURED IN GLASS REINFORCED POLYESTER (GRP). COVER IS FINISHED IN GREEN TO B.S.4800 TINT 12B25
 2. ELECTRICAL SUPPLY 240 VOLTS, 2amps, SINGLE PHASE (THREE PHASE OPTIONAL) CONTROL PANEL SUPPLIED.
 3. BIDDISC MUST BE LIFTED BY THE LIFTING POSITIONS PROVIDED.
 4. FOR INSTALLATION, MAINTENANCE AND DESUDGE DETAILS REFER TO PROCEDURE DOCUMENTS SUPPLIED WITH UNIT.
 5. DIMENSIONS APPLICABLE TO 600 INVERT HEIGHT DMLY.

ISSUE	DATE	BY	INITIALS	DESCRIPTION
3	24/04/18	L.S.	CC1235	INLET/OUTLET DIMS FOR BP-BL BIDDISCS
2	19/11/12	L.S.	CC1104	
1	17.05.10	J.C.		INITIAL ISSUE

Kingspan
Environmental

**BF BIDDISC
GENERAL
DIMENSIONS**

SCALE	1:15	SHEET SIZE	A1
DRAWING No.	DS0498P	ISSUE	3

ALL DIMENSIONS ARE IN MILLIMETRES - DO NOT SCALE